

CE

FULMO



Please read the instructions carefully before first use and maintenance.

Si us plau, llegiu atentament les instruccions abans del primer ús i manteniment.

VENTILADOR GALERNA



(ES) PLEASE DO NOT COVER

(CAT) IF US PLAU DOES NOT CHARGE

(PT) PLEASE DO NOT CHARGE

(EN) PLEASE DO NOT COVER



(EN) This product is only suitable for well-insulated spaces or occasional use.

(CAT) This product is only suitable for foreign or occasional use.

(PT) This product is only suitable for insulated spaces or occasional use.

(EN) This product is only suitable for well insulated spaces or occasional use.



fulmo.es



@fulmo_


1.SAFETY PRECAUTIONS	2
2.PARTS	3
3.INSTALLATION	3
4.BEFORE USE AND OPERATION	4
5.CLEANING AND MAINTENANCE	5
6.TECHNICAL SPECIFICATIONS	5
7.RECYCLING OF APPLIANCES	5
8.CE COMPLIANCE	5
9.WARRANTY	6

1. SAFETY PRECAUTIONS

Read all instructions carefully, even if you are familiar with this appliance. To reduce the risk of fire, electric shock, and/or injury, you should observe the following basic safety precautions:

1. The fan must be connected to a 220V AC 50Hz power supply.
2. All electrical work must be carried out after disconnecting the power or turning off the switch.
3. Do not use outdoors or where it may be exposed to water or excessive humidity.
4. Do not connect the fan to a dimmer switch, as this may cause unsatisfactory performance and cause damage to the motor.
5. Keep out of the reach of children or people with reduced physical, mental or sensory capabilities. Connection, cleaning or maintenance operations can be carried out from the age of eight if they have been given appropriate supervision or training regarding the use of the appliance in a safe manner and understand the dangers involved. Do not let anyone play with this device.
6. The fan cannot be started in a room with a gas appliance operating at the same time.
7. Do not insert any object into the fan blades while it is in operation.
8. If the power cord is damaged, it must be replaced by the manufacturer or qualified personnel to avoid the risk.
9. In order to avoid danger, all repairs to the appliance must be carried out by a professional technical service, never by yourself.
10. Before accessing the terminals, all power circuits must be disconnected.

2 PARTS

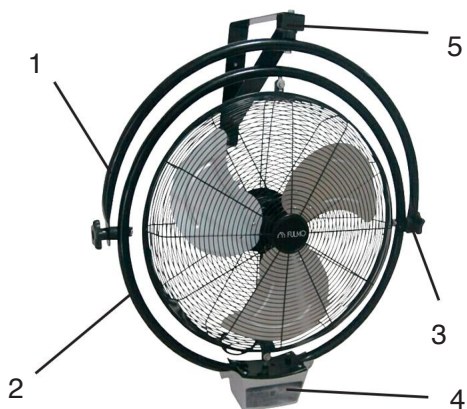

1. Exterior metal frame
2. Inner metal frame
3. Adjustment buttons
4. Control panel
5. Wall mount

3. INSTALLATION




IMAGE 1



IMAGE 2



P1. Install the metal frame on the wall or shelf, make sure it can support the weight of the fan.

P2. Flip the metal semicircle frame from bottom to top.



P3. Squeeze the handles on both sides of the fan.




IMAGE 3



IMAGE 4

P4. Use a screw to connect the holes of the metal semicircle frame to the top of the frame. (Image 3) Tighten the screw with the nut (Image 4). Note: Do not fully tighten the nut, leave some space so that the fan can rotate left and right.

4. BEFORE USE and operation

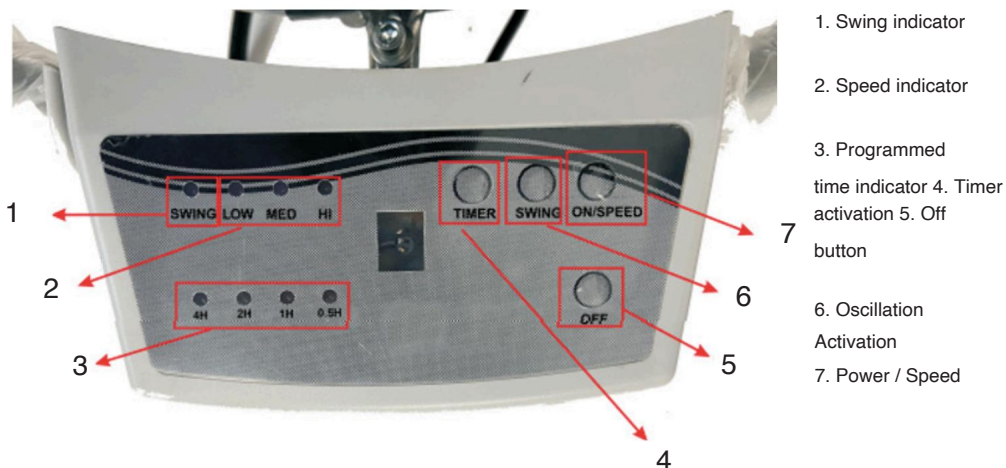

Connect the power cord to the power source and press “ON”.

The speed can be adjusted with the “ON/Speed” button, “HIGH” indicates the fast speed; “MED” indicates the medium speed and “LOW” indicates the slow speed. To activate the oscillating movement, press the “SWING” button.

The timer is activated by pressing TIMER on the remote control. You can activate from half an hour to 4 hours, going through 30 minute intervals. If you press the fan once it will activate for 30 minutes, the 0.5 indicator will light up. If you press this key The timer will increase your time to one hour. As you press this key, this interval can be increased, indicating the programmed time through the light indicators on the control panel.

To turn off the device, press the OFF button and unplug it.

5. cleaning and maintenance

Turn off and unplug the appliance before cleaning it. Do not use sponges or abrasive cleaning products to clean the product. During cleaning, avoid water dripping on or into the fan motor housing.

Use a soft, damp cloth to clean the outside. If the fan is not going to be used for a long period of time, store it in a dry, safe place, protected from dirt.

6. technical specifications

Product reference: 309040211

Product: Galerna Fan

Power: 120W

Diameter: 60cm

Voltage: 220-240 V~ 50 Hz

Made in China

7. recycling of appliances

The European directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE) specifies that household appliances should not be recycled with the rest of municipal waste. These appliances must be disposed of separately, to optimize the recovery and recycling of materials and, in this way, reduce the impact they may have on health and the environment.

The crossed out bin symbol reminds you of your obligation to dispose of this product correctly. To dispose of their appliances and/or the corresponding batteries, the consumer must take them to a Clean Point.

8. ce compliance

Avanzza Traders International SL declares under its own responsibility that it has been GALERNA FAN product with the CE , developed and produced in accordance regulation regarding the following sections and with the harmonized standards:

-IEC 60335-2-80:2003+A1:2004+A2:2009	-IEC 62321-4:2014+A1:2017
-IEC 60335-1:2012+A11:2014+A13:2017+A14:2019	-IEC 62321-6:2015
+A15:2021+A1:2019+A2:2019	-IEC 62321-7-1:2015
-EN 62233:2008	-IEC 62321-7-2:2017
-EN IEC 55014-1:2021	-IEC 62321-8:2017
-EN IEC 55014-2:2021	
-EN IEC 61000-3-2:2019+A1:2021	
-EN 61000-3-3:2013+A1:2019+A2:2021+AC:2022	
-IEC 62321-3-1:2014	
-IEC 62321-5:2014	

9. warranty

All products have the guarantee of AVANZZA TRADERS INTERNATIONAL SL for a period of 3 years from the date of purchase, s/ the General Law for the Defense of Consumers and Users, with the exception of 1 YEAR* for batteries and chargers. battery. However, when the lack of conformity appears after 6 months, the consumer must prove that the defect existed from the beginning, and can only do so through independent expert reports. The warranty period begins on the date of purchase. The original purchase invoice, which includes the date and the name of the model, will be the proof that will allow you to prove the date, and it is essential to attach a copy. In this type of devices it is normal to suffer bumps and accidents that can leave an externally visible sequel to the accident that occurred. Also, failure to properly assemble and adjust the product before use may cause malfunction or even an accident. Before thinking that your product is defective, you must verify that you use it correctly and appropriately, and that you know the operating instructions. That is why it is essential to read and perfectly understand the instructions for use and assembly of the product. Good adjustment and maintenance of the device are essential to avoid future breakdowns.

The Official Technical Service in Spain for all brand products, FULMO is operated by THE OFFICIAL SAT OF AVANZZA TRADERS INTERNATIONAL. Once the customer detects a possible anomaly or failure of the product, they must contact the establishment where they purchased it to activate the incident. Repairs, whether under warranty or not, will be carried out by THE OFFICIAL SAT OF ATI, which will analyze possible product breakdowns in order to determine compliance with the warranty.

If the product meets the warranty conditions, all expenses derived from repair and shipping will be free. If the product, once in our facilities and analyzed by qualified personnel, is determined to not meet the warranty conditions specified in the manual, a quote will be made that is valid for 30 days. If after this period we have no communication from From the client we understand that he rejects said quote. If it is accepted by the client, they must pay a quote, which includes shipping. If the client renounces the quote, they have two possibilities:

1. If you want to recover the product, you must pay the shipping costs.
2. If you do not wish to recover it, you authorize us to recycle the product.

Any FULMO product that has been altered, opened, manipulated or modified by personnel other than SAT OFFICIAL will automatically lose any type of guarantee. The establishment must send an email to SAT@AVANZZATRADERS.COM and will receive instructions on the procedure to follow.

If the client wishes to activate the guarantee by their own means, they must send an email to sat@avanzzatraders.com where the procedure to follow will be indicated.

This warranty covers the end user with normal use of the product and against manufacturing defects. Never for:

- Products that have been used for any function other than that originally intended (commercial use, rental, etc.).
- Items without original packaging or proof of purchase.
- Defects or damages due to incorrect use or manipulation of the material (such as electrical damage, overloads or poor power supply...).
- The wear and tear of consumables such as batteries, filters, membranes, etc., and aesthetic damage.
- Decreases in functionality (decrease in battery life, etc.) due to exceeding their design limitations (overloads, excessive use, inappropriate uses, etc.).

Sincerely, the FULMO team.

Índex


1.PRECAUCIONS DE SEGURETAT	8
2.PECES	9
3.INSTAL·LACIÓ	9
4. ABANS D'ÚS I FUNCIONAMENT	10
5.NETEJA I MANTENIMENT	11
6. ESPECIFICACIONS TÈCNIQUES	11
7. RECICLATGE D'EPARATGES	11
8. CE COMPLIMENT	11
9. GARANTIA	12

1. PRECAUCIONS DE SEGURETAT

Llegiu atentament totes les instruccions, fins i tot si esteu familiaritzat amb aquest aparell. Per reduir el risc d'incendi, descàrrega elèctrica i/o lesions, s'han d'observar les precaucions bàsiques de seguretat següents:


1. El ventilador s'ha de connectar a una font d'alimentació de 220 V CA 50 Hz.
2. Tots els treballs elèctrics s'han de realitzar després d'apagar l'alimentació o apagar l'interruptor.
3. No utilitzeu el ventilador a l'exterior o en llocs on pugui estar exposat a l'aigua o a una humitat excessiva.
4. No connecteu el ventilador a un interruptor atenuador, ja que això pot provocar un rendiment baix i danyar el motor.
5. Mantenir el ventilador fora de l'abast dels nens o persones amb capacitats físiques, mentals o sensorials reduïdes. Les operacions d'embenat, neteja i manteniment poden ser realitzades per persones a partir de 8 anys, sempre que tinguin supervisió o instruccions sobre l'ús segur del dispositiu i entenguin els riscos que comporta. No permetis que ningú salti amb aquest dispositiu.
6. El ventilador no s'ha d'utilitzar en cap habitació amb un aparell de gas en funcionament al mateix temps.
7. No introduïu objectes més enllà del ventilador mentre estigui en funcionament.
8. Si el cable d'alimentació està danyat, l'ha de substituir el fabricant o personal qualificat, per evitar riscos.
9. Per evitar qualsevol risc, totes les reparacions del dispositiu han de ser realitzades per un tècnic qualificat.
10. Abans d'accedir als terminals, s'han de desconnectar tots els circuits d'alimentació.

2 PECES

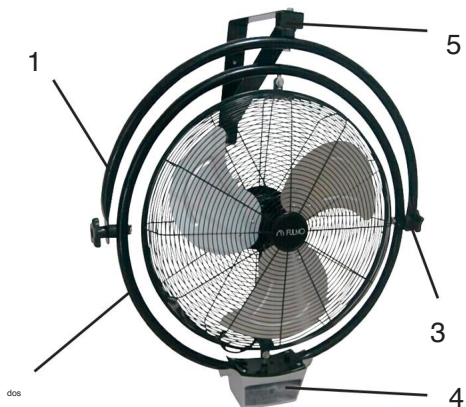

1. Estructura metàl·lica externa
2. Estructura metàl·lica interna
3. Perilles d'ajust
4. Tauler de control
5. Muntar a la paret

3. INSTAL·LACIÓ



IMATGE 1



IMATGE 2

P1. Instal·leu l'estructura metàl·lica a la paret o prestatge, assegureu-vos que suporta el pes del ventilador.

P2. Gireu el marc metàl·lic semicercle de baix a dalt.



P3. Premeu les nanses als dos costats del ventilador.




IMATGE 3



IMATGE 4

P4. Utilitzeu un cargol per connectar els forats del marc metàl·lic semicircular a la part superior del marc. (imatge 3) Premeu el cargol amb la femella (imatge 4). Nota: No premeu completament la femella, deixeu una mica d'espai perquè el ventilador pugui girar cap a l'esquerra i la dreta.

4. ABANS D'ÚS i funcionament

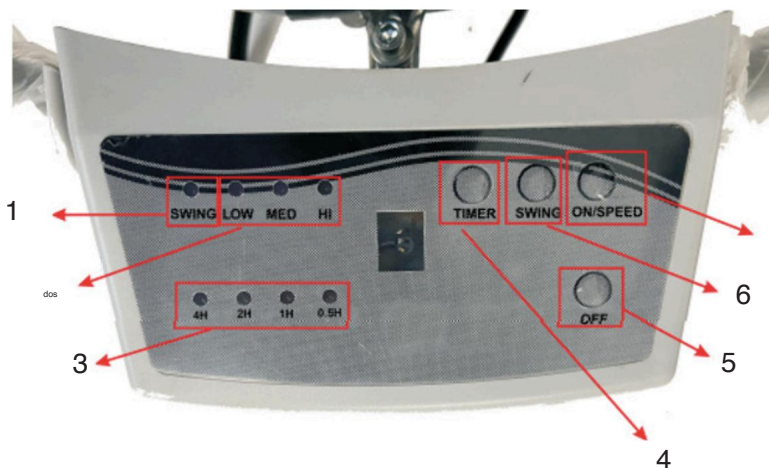

1. Indicador oscil·lació
2. Indicador velocitat
3. Indicador cita
4. Activació de temporitzador
5. Botó apagat
6. Activació de equilibri
7. Potència / Velocitat

Connecteu el cable d'alimentació a la font d'alimentació i premeu "ON".

La velocitat es pot ajustar amb el botó "ON/Speed", "ALTA" indica la velocitat ràpida; "MED" indica velocitat mitjana i "BAIX" indica velocitat lenta. E. Per activar el moviment oscil·lant, premeu el botó "SWING".

El temporitzador s'activa prement TIMER al comandament a distància. Podeu activar des de mitja hora fins a 4 hores, passant per intervals de 30 minuts. Si premeu el ventilador una vegada, s'activarà durant 30 minuts, l'indicador 0,5 s'il·luminarà. Si premeu aquesta tecla

El temporitzador augmentarà el vostre temps a una hora. Prement aquesta tecla es pot augmentar aquest interval, indicant el temps programat a través dels indicadors lluminosos del tauler de control.

Per apagar el dispositiu, premeu el botó OFF i desconnecteu-lo.

5. neteja i manteniment

Apagueu i desconnecteu l'aparell abans de netejar-lo. No utilitzeu esponges ni productes de neteja abrasius per netejar el producte. Durant la neteja, eviteu degotejar aigua a la carcassa del motor del ventilador.

Utilitzeu un drap suau i humit per netejar l'exterior. Si el ventilador no s'utilitzarà durant un llarg període de temps, guardeu-lo en un lloc sec, segur i protegit de la brutícia.

6. especificacions tècniques

Referència del producte: 309040211

Producte: Fan Galerna

Potència: 120 W

Diàmetre: 60 cm

Tensió: 220-240V ~ 50Hz

Fabricat a la Xina

7. Reciclatge d'electrodomèstics

La directiva europea 2012/19/UE sobre residus d'aparells elèctrics i electrònics (RAEE) especifica que els electrodomèstics no s'han de reciclar amb la resta de residus municipals. Aquests aparells s'han d'eliminar per separat, per optimitzar la recuperació i el reciclatge dels materials i, d'aquesta manera, reduir l'impacte que poden tenir sobre la salut i el medi ambient.

El símbol d'escombraries ratllat us recorda la vostra obligació d'eliminar correctament aquest producte. Per disposar dels seus aparells i/o bateries corresponents, el consumidor haurà de portar-los a un Punt Net.

8. Conformitat CE

Avanza Traders International SL declara sota la seva pròpia responsabilitat que el producte GALERNA FAN s'ha desenvolupat i produït d'acord amb la normativa de la CE pel que fa als següents apartats i estàndards harmonitzats:

- IEC 60335-2-80:2003+A1:2004+A2:2009
- IEC 60335-1:2012+A11:2014+A13:2017+A14:2019
- +A15:2021+A1:2019+A2:2019
- EN 62233:2008
- EN IEC 55014-1:2021
- EN IEC 55014-2:2021
- EN IEC 61000-3-2:2019+A1:2021
- EN 61000-3-3:2013+A1:2019+A2:2021+AC:2022
- IEC 62321-3-1:2014
- IEC 62321-5:2014
- IEC 62321-4:2014+A1:2017
- IEC 62321-6:2015
- IEC 62321-7-1:2015
- IEC 62321-7-2:2017
- IEC 62321-8:2017

9. Garantia

Tots els productes estan garantits per AVANZZA TRADERS INTERNATIONAL SL durant un període de 3 anys a partir de la data de compra, d'acord amb la Llei General de Protecció de Consumidors i Usuaris, excepte 1 ANY* per a bateries i carregadors de bateries. No obstant això, quan la falta de conformitat es manifesta al cap de 6 mesos, el consumidor ha d'acreditar que el defecte existia des del principi, i només pot fer-ho mitjançant informes pericials independents. El període de garantia comença a la data de compra. La factura de compra original, que inclou la data i el nom del model, serà el justificant que permetrà acreditar la data, i és imprescindible adjuntar-ne una còpia. En aquest tipus d'aparells, és normal patir cops i accidents que poden deixar una conseqüència visible externament de l'accident que s'ha produït. A més, no muntar i ajustar correctament el producte abans del seu ús pot provocar un mal funcionament o fins i tot un accident. Abans de pensar que el teu producte és defectuós, has de comprovar que el fas servir correctament i correctament i que coneixes les instruccions d'ús, per això és imprescindible llegir i entendre completament les instruccions d'ús i muntatge del producte. Un bon ajust i manteniment del dispositiu són fonamentals per evitar futures avaries.

El Servei Tècnic Oficial a Espanya per a tots els productes de la marca FULMO està operat per THE OFFICIAL SAT OF AVANZZA TRADERS INTERNATIONAL. Un cop el client detecti una possible anomalia o fallada del producte, s'ha de posar en contacte amb l'establiment on l'ha adquirit per activar la incidència. Les reparacions, dins o fora de la garantia, seran realitzades pel SAT OFICIAL d'ATI, que analitzarà possibles avaries del producte per determinar el compliment de la garantia. Si el producte compleix les condicions de garantia, tots els costos de reparació i enviament seran gratuïts.

Si el producte, un cop a les nostres instal·lacions i analitzat per personal qualificat, es determina que no compleix les condicions de garantia especificades en el manual, es farà un pressupost vàlid per 30 dies. Si transcorregut aquest termini no tenim cap comunicació del client, entenem que rebutja l'esmentada cotització. Si ho accepta el client, haurà de pagar un pressupost que inclogui les despeses d'enviament. Si el client renuncia al pressupost, hi ha dues possibilitats:

1. Si vols recuperar el producte, hauràs de pagar les despeses d'enviament.
2. Si no desitja recuperar-lo, ens autoritza a reciclar el producte.

Qualsevol producte FULMO que hagi estat alterat, obert, manipulat o modificat per personal diferent de SAT OFICIAL perdrà automàticament qualsevol tipus de garantia. L'establiment haurà d'enviar un correu electrònic a SAT@AVANZZATRADERS.COM i rebrà instruccions sobre el procediment a seguir.

Si el client vol activar la garantia pels seus propis mitjans, haurà d'enviar un correu electrònic a sat@avanzatraders.com on s'indicarà el tràmit a seguir.

Aquesta garantia cobreix l'usuari final per a l'ús normal del producte i contra defectes de fabricació. No s'atura mai:

- Productes que s'hagin utilitzat per a qualsevol funció diferent de la prevista inicialment (ús comercial, lloguer, etc.).
- Articles sense embalatge original ni prova de compra.
- Defectes o danys per mal ús o manipulació del material (com ara danys elèctrics, sobrecàrregues o mal subministrament elèctric...).
- El desgast de consumibles com piles, filtres, membranes, etc., i danys estètics.
- Disminució de la funcionalitat (disminució de la durada de la bateria, etc.) per la superació de limitacions de disseny (sobrecàrregues, ús excessiu, usos inadequats, etc.).

Atentament, equip FULMO.